


EGANT™

BOXES, ACCESSORIES AND FLEXIBLE TUBES FOR CONCRETE CASTING

BOXES AND ACCESSORIES FOR CONCRETE CASTING

EGANT introduces a new range of electrical installation materials for concrete construction projects. Our boxes and accessories can be easily installed on the formwork before the actual concrete process and then cast in place. The high stability and strength of the EGANT concrete products protect the interior from the concrete that guarantees high positional stability. It assures versatile and stable solutions for electrical installation in the widest variety of buildings and structures.

- **THE HIGHEST QUALITY FRAME**
- **IN PARTICULAR STABLE SHELL**
- **MADE OF HALOGEN-FREE PLASTIC**

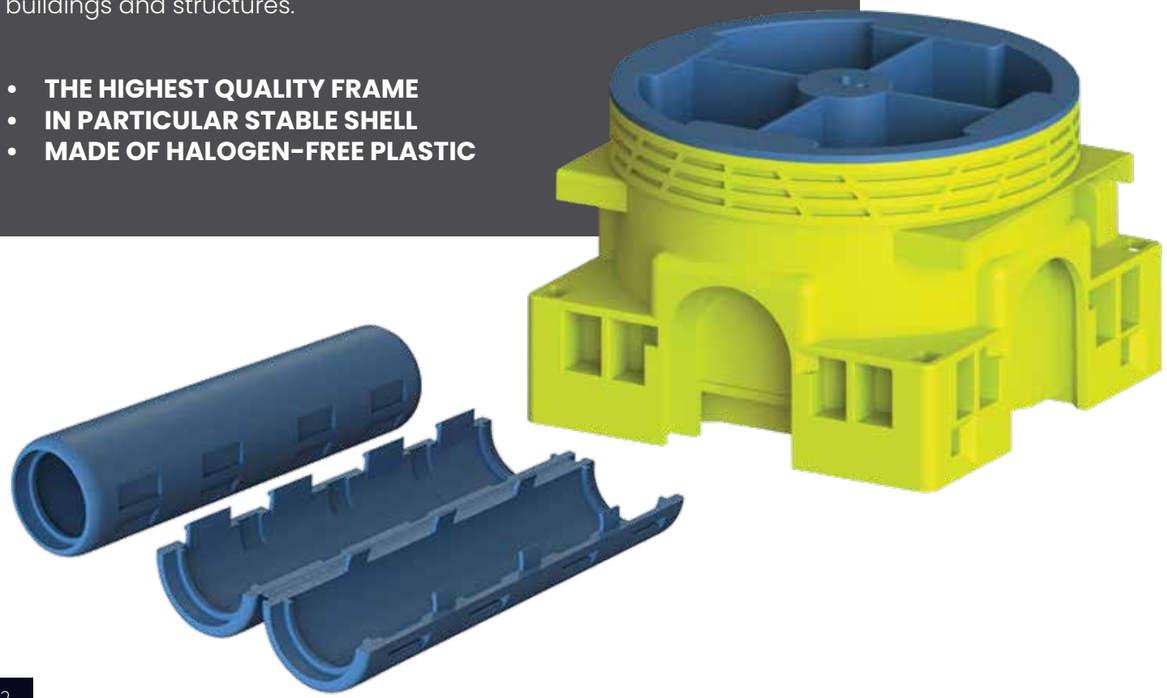

FINEST ELECTRICAL INSTALLATION PRODUCTS FOR DIY AND SEMI-PROFESSIONAL MARKETS

30
YEARS OF EXPERIENCE

NORDIC
QUALITY

PRICE & QUALITY
MATCH

EGANT offers a wide range of electrical installation materials for DIY (“Do-It-Yourself”) and SEMI-professional markets.
We benefited greatly from over 30 years of experience in manufacturing the finest electrical goods. Our products are carefully tested and produced in consultations with our customers.
The company’s headquarters is based in Norway, own factory in China and distribution allows us to bring the highest quality electrical goods at the best prices.

INTERNATIONAL CERTIFICATION

EGANT products are certified and in line with international ISO 9001 and ISO 14001 standards.

Our products are approved by well-known testing institutions such as ITS, Semko, VDE, CE Marking.

CE

Intertek

EMC VERIFIED

Intertek

ISO 9001

ISO 14001


LIME SERIES: BOXES & ACCESSORIES







UNIVERSAL SERIES: BOXES & ACCESSORIES







FLEXIBLE TUBES:



CONTACT

ANDREJUS KUZMICKAS

Business Development Manager The Baltics

andrejus.kuzmickas@etman.lt

+370 665 51711

www.egant.no

For individual product offers and extended product range, contact us directly.

LIME SERIES: OUTLET BOXES

Colour: Yellow (box body)
Main material: PP (Halogen free)
IP-Class:IP30
Working temperature: -25ºC to +60ºC
Installation temperature: -5ºC to +25ºC
Fire hazard test: 850ºC (IEC60695-2-11)
The product is in conformity with the provisions of the following European directive(s): LVD RoHS WEEE
Certificate(s): CE, Semko
Quality management system according to: ISO 9001
Environmental management system: ISO 14001
Occupational Health and Safety Management System: ISO 45001
The product complies with the standard(s): EN 60670-1



1140281



1140265




1140266




1140267

Product no.	Type	Description	Package
1140265	ETM750S	Outlet box without inlets	175
1140266	ETM751S	Outlet box with 2 inlets	125
1140281	ETM750S.LID	LID for outlet boxes. Fit to 1140265 & 1140266	500
1140280	ST2.9x30-F-Z	Screw, 30mm, PZ1, FLAT Head	125
1140267	ETM754S	Outlet box high (70mm) with 2x20mm inlets	80



1140265



1140266

LIME SERIES: JUNCTION BOXES

Colour: Yellow (box body)
Main material: PP (Halogen free)
IP-Class:IP30
Working temperature: -25ºC to +60ºC
Installation temperature: -5ºC to +25ºC
Fire hazard test: 850ºC (IEC60695-2-11)
The product is in conformity with the provisions of the following European directive(s): LVD RoHS WEEE
Certificate(s): CE, Semko
Quality management system according to: ISO 9001
Environmental management system: ISO 14001
Occupational Health and Safety Management System: ISO 45001
The product complies with the standard(s): EN 60670-1



1140269



1140270





1140271




1140272


Product no.	Type	Description	Package
1140270	ETM760S	Junction box without inlets, 48mm	100
1140271	ETM761S	Junction box with inlets, 53mm	60
1140272	ETM762S	Junction box with inlets, 73mm	45
1140269	ETM763S	LID Junction boxes, c/c78. Fit to 1140270 & 1140271	200









1140269



1140271



1140272



1140270

LIME SERIES: ACCESSORIES

Colour: Blue
Main material: PP (Halogen free)
IP-Class:IP20
Working temperature: -25ºC to +60ºC
Installation temperature: -5ºC to +25ºC
Fire hazard test: 850ºC (IEC60695-2-11)
The product is in conformity with the provisions of the following European directive(s): LVD RoHS WEEE
Certificate(s): CE, Semko
Quality management system according to: ISO 9001
Environmental management system: ISO 14001
Occupational Health and Safety Management System: ISO 45001
The product complies with the standard(s): EN 60670-1

Product no.	Type	Description	Package
1140275	ETM770S	Single inlet for Ø20mm conduit	1200
1140282	ETM778S	Single inlet for Ø25mm conduit	1000
1140276	ETM771S	Strain relief inlet for Ø6-11mm insulated cables	2400
1140277	ETM772S	Internal connector for connecting mounting boxes side by side with c/c distance 71 mm	2000
1140278	ETM773S	Box support 42-64mm. Available length 42, 45, 64mm	800
1140287	ETM779S	Interconnector 102mm	600
1140279	ETM774S	Box support 42-95mm. Available length 42, 45, 67, 70, 90, 95mm	600



1140275

1140276

1140277


1140278

1140279


UNIVERSAL SERIES: BOXES & ACCESSORIES

Colour: White (box body)
Main material: PP (Halogen free)
IP-Class:IP30
Working temperature: -25ºC to +60ºC
Installation temperature: -5ºC to +25ºC
Fire hazard test: 850ºC (IEC60695-2-11)
The product is in conformity with the provisions of the following European directive(s): LVD RoHS WEEE
Certificate(s): CE, Semko
Quality management system according to: ISO 9001
Environmental management system: ISO 14001
Occupational Health and Safety Management System: ISO 45001
The product complies with the standard(s): EN 60670-1

Product no.	Type	Description	Package
1230050	ETM812S	Boxes for concrete, with lid, 1x2xØ20mm inlets	100
1230051	ETM813S	Boxes for concrete, with lid, 2x2xØ20mm inlets	75
1230052	ETM791S	Connection piece of boxes for concrete with opened hole	1200
1230053	ETM793S	inlets of boxes for concrete, 2xØ20mm, plugs in the end of inlets, with clip.	500



1230050



1230051



1230050




1230051




1230052



1230053



1230052

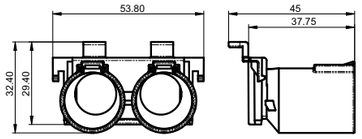

1230053

ACCESSORIES:

FOR TUBE-FUSE BOX

Product no.	Type	Description	Package
1230041	ETM235S	Ø16mm	750
1230042	ETM236S	Ø20mm	500
1230045	ETM651S	Ø25mm	500
1230046	ETM652S	Ø32mm	200
1230047	ETM653S	Ø40mm	120
1230048	ETM654S	Ø50mm	100


1230041


1230042


1230045


1230046


1230047


1230048

Product no.	Type	Description	Package
1201376	ETM654S-1	Fitting for 50mm holes in cabinets and with 2x16mm+3x16/20mm inlets	210


1201376

STRAIGHT EXTENSION PIPES

Product no.	Type	Description	Package
1230043	ETM237S	Ø16mm, with locker	600
1230044	ETM238S	Ø20mm, with locker	500
1230054	ETM655S	Ø25mm, with locker	200
1230055	ETM656S	Ø32mm, with locker	150
1230056	ETM657S	Ø40mm, with locker	100
1230057	ETM658S	Ø50mm, with locker	80



EGANT™


ACCESSORIES: BUSHING INSULATORS

Colour: Yellow (box body)
Main material: PP (Halogen free)
IP-Class:IP20
Working temperature: -25°C to +60°C
Installation temperature: -5°C to +25°C
Fire hazard test: 850°C (IEC60695-2-11)
The product is in conformity with the provisions of the following European directive(s): LVD RoHS WEEE
Certificate(s): CE, Semko
Quality management system according to: ISO 9001
Environmental management system: ISO 14001
Occupational Health and Safety Management System: ISO 45001
The product complies with the standard(s): EN 60670-1
Technical info:
Bushing insulators are used in concrete casting, for example when cabling from the space above the suspended ceiling to walls.
The bushing is fastened by nailing it to the mould. When the mould is disassembled, the nails come loose with the mould.
The casting protector included with the bushing prevents the concrete from entering the conduit.
Possible connect bushing insulators to each other.
Suitable nail size 2.7x2.7mm



1140262
1140263


1140289

Product no.	Type	Description	Package
1140262	ETM775S	Bushing insulator 20mm	250
1140263	ETM776S	Bushing insulator 25mm	200
1140289	ETM800S	5-way busching insulator. The sleeve has a 4x20mm bushing and a 1x25mm bushing. The sleeve has a steel clip in both the top and bottom pipe fittings. This ensures that the pipe does not fall during the installation phase.	100



1140262



1140263

ACCESSORIES: FOR TUBE-FUSE BOX

Product no.	Type	Description	Package
1203693	ETM550S	Splitable connection pipe for repair 16 mm flexible tube with cables inside	300
1203694	ETM551S	Splitable connection pipe for repair 20 mm flexible tube with cables inside	300





Product no.	Type	Description	Package
1200521	ETM554S	Splitable adapter 16mm to 20mm for flex pipes	300





FLEXI TUBES:

Color: Pale yellow, white
Main material: PE, PP
IP-Class: IP20
Classification code: 2222
Operating temperature range: -5°C to +90°C
Compression resistance: 320N / 750N
The product complies with the standard(s):
EN50086-2-2
EN61386-1
EN14582
The product is in conformity with the provisions of the following European directive(s): RoHS WEEE REACH
Quality management system: ISO 9001
Environmental management system: ISO 14001



Product no.	Description	Package
2232016	Flex pipe **320N 16mm** PVC with pilot	50m
2232020	Flex pipe **320N 20mm** PVC with pilot	50m
2232025	Flex pipe **320N 25mm** PVC with pilot	50m
2232032	Flex pipe **320N 32mm** PVC with pilot	25m
2275020	Flex pipe **750N 20mm** PVC	50m
2275025	Flex pipe **750N 25mm** PVC	50m
2332016	Flex pipe HF **320N 16 mm** HALOGEN FREE	100m
2332020	Flex pipe HF **320N 20 mm** HALOGEN FREE	50m
2332025	Flex pipe HF **320N 25 mm** HALOGEN FREE	50m
2375016	Flex pipe HF **750N 16 mm** HALOGEN FREE	100m
2375020	Flex pipe HF **750N 20mm** HALOGEN FREE	50m
2375025	Flex pipe HF **750N 25mm** HALOGEN FREE	50m
2375032	Flex pipe HF **750N 32mm** HALOGEN FREE	50m

WELL-LOCATED DISTRIBUTION CENTRE IN LITHUANIA

The main warehouse of EGANT products is based at the UAB Etman distribution centre in Klaipeda, Lithuania - situated within the FEZ Industrial Park. Here we have in stock all the EGANT products for DIY and SEMI-professional markets. The distribution centre benefits from 1250 square meters of warehouse space, its modern office, showroom and meeting rooms. Quick handling and good logistics ensure deliveries to our customers within 3-5 working days.



FULLY STOCKED WAREHOUSE IN KLAIPEDA, LITHUANIA



- AVOID LONG DELIVERY TERMS FROM CHINA
- FLEXIBLE AND EFFICIENT HANDLING
- PACKED IN BAGS WITH HEAD CARDS
- OR SEMI-PROFESSIONAL PACKAGING WHERE EACH PRODEACT HAS INDIVIDUAL EAN MARKING
- A GOOD ALTERNATIVE FOR SUPPORT PURCHASE

EGANT™

PRODUCTION: FACTORY IN CHINA

Our factory in Changzhou, China, is located around 180 km northwest of Shanghai.
It has a staff of more than 350 and is the heart of production. With our manufacturing expertise of nearly 30 years, we continue developing and improving our production using LEAN processes. Our manufacturing processes are certified to the international standards of ISO 9001 and ISO 14001. Own factory enables us to combine low production costs with the highest quality.



SUSTAINABILITY



Sustainability is always within our goals.
EGANT production is environmentally certified by international ISO 14001 standards.
By currently improving product packaging, we aim to reduce the use of plastic by 30%.
Furthermore, more conveniently packed products mean “leaner” logistics costs, better transportation and overall reduced energy consumption. We are keen on remaining a part of the environmentally friendly community.

ANDREJUS KUZMICKAS
Business Development Manager The Baltics
andrejus.kuzmickas@etman.lt
+370 665 51711

For individual product offers and extended product range, contact us directly.

EGANT™

www.egant.no